LED CYLINDER | SURFACE and WALL MOUNT


LED CYLINDER
INSTALLATION INSTRUCTIONS

RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


IMPORTANT

1. Read all instructions.
2. Install in accordance with national and local electrical code regulations.
3. This product is intended to be installed and serviced by a qualified, licensed electrician.
4. Do not install in wet locations. For dry and damp use only.
5. Turn off electrical power before installing or servicing fixture in any way.
6. To reduce the risk of fire and overheating, make sure all connections are tight.
7. Under no circumstances can the lighting fixture be covered with heat insulation gasket or similar materials.

WIRING

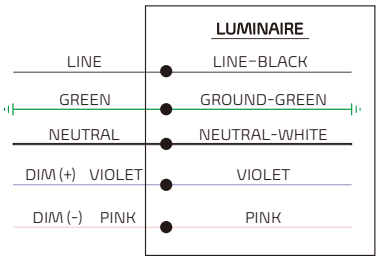


STRUCTURE OF LAMP

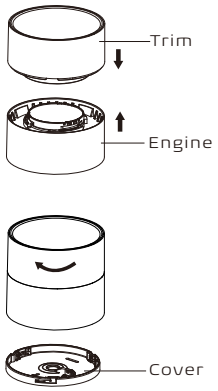

When trim and engine are separated, attached together, and secure them with clockwise direction.

Surface Mount

INSTALLATION

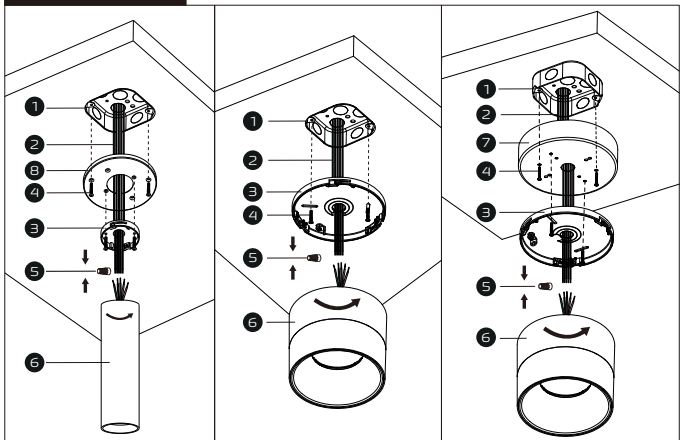


3" Surface Mount In The Recessed J-box

4"/6"/8"Surface Mount In The Recessed J-box

3"/4"/6"/8"Surface Mount In The Surface J-box


PARTS

1. 4" Octogon Junction Box (By Others)
2. Power Cord (By Others)
3. 3"/4"/6"/8" Cover
4. Screw KM4*22
5. Wire Nut
6. 3"/4" /6" /8"lamp
7. 6" Canopy Power Feed
8. Surface Mount Kit (Only for 3in cylinder)

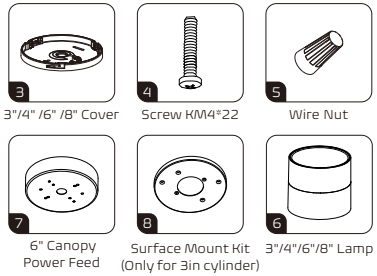


Wall Mount

Step 1

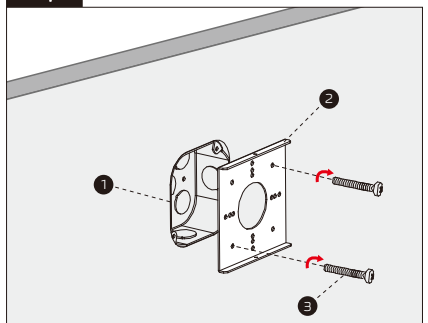


Fix the wall mount bracket into the junction box.

Step 2 Wiring

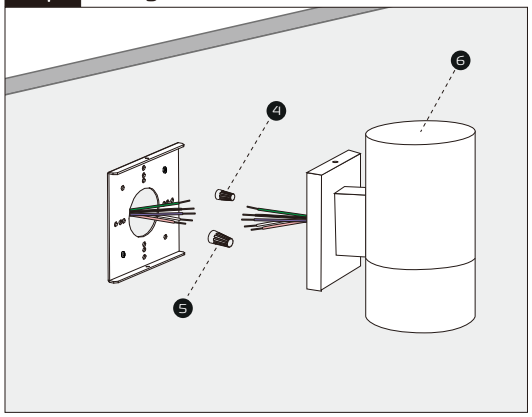


Step 3

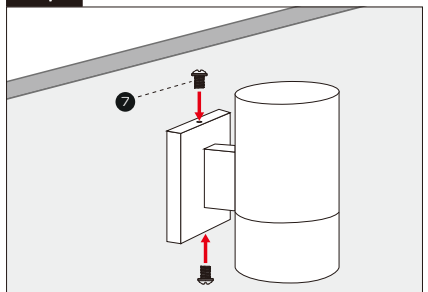

Install the cylinder and fasten the screws

PARTS

1. 4" Octogon Junction Box (By Others)
2. Wall Mount Bracket
3. Screw 8-32*22
4. Wire Nut P2
5. Wire Nut P3
6. 3"/4"/6"/8" Lamp
7. Screw PM3*8

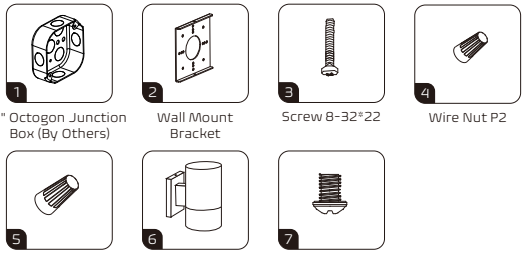

! ATTENTION: Install in accordance with national and local building and electrical codes.


All rights reserved. Due to continuous product improvements, specifications and dimensions are subject to change without notice.

LED CYLINDER PENDANT

LED CYLINDER
INSTALLATION INSTRUCTIONS

RISK OF FIRE AND ELECTRICAL SHOCK. FIXTURE MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN ONLY IN ACCORDANCE WITH NATIONAL, LOCAL BUILDING AND ELECTRICAL CODES. DISCONNECT POWER AT ELECTRICAL PANEL BEFORE SERVICING.


3" And 4" Pendant With Cable

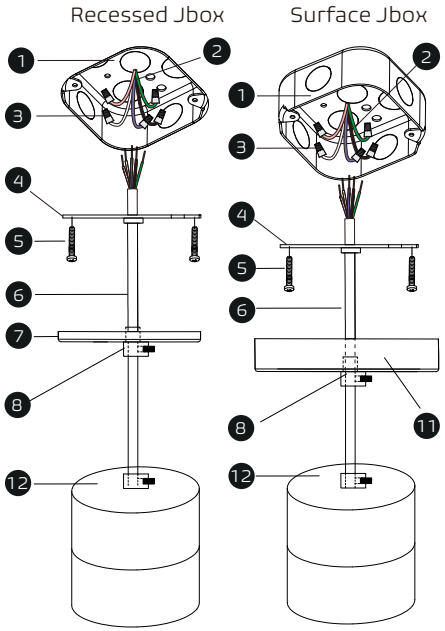


PARTS


1. 4" Octogon Junction Box (By Others)
2. Power Cord (By Others)
3. Wire Nut
4. Junction Box Crossbar
5. Screw PM4*22
6. Power Cord
7. 4" Canopy Power Feed
8. Cable Clip
9. Cable Holder
10. Aircraft Cable
11. 6" Canopy Power Feed
12. 3"/4"/6"/8" Lamp
13. Screw nut


6" And 8" Pendant With Cable

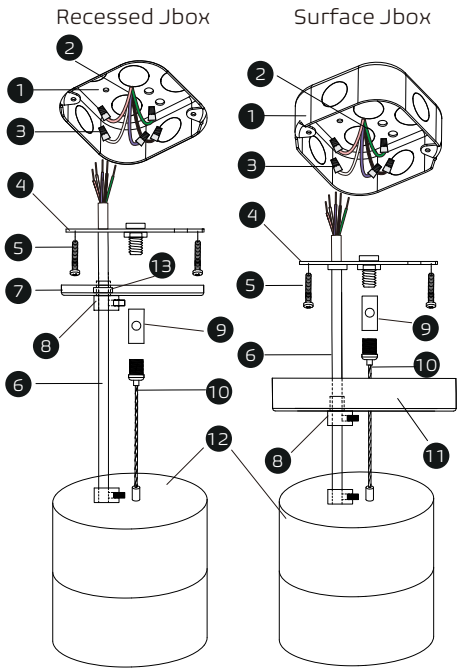

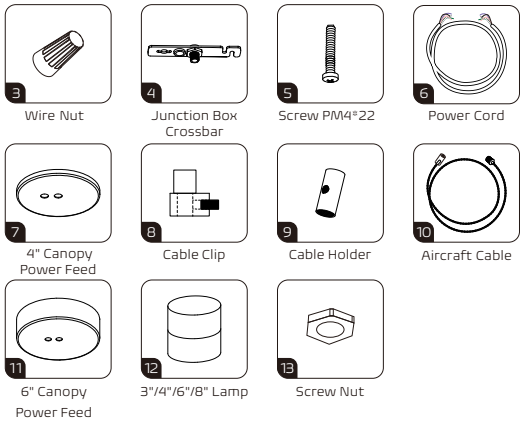

Pendant With Stem

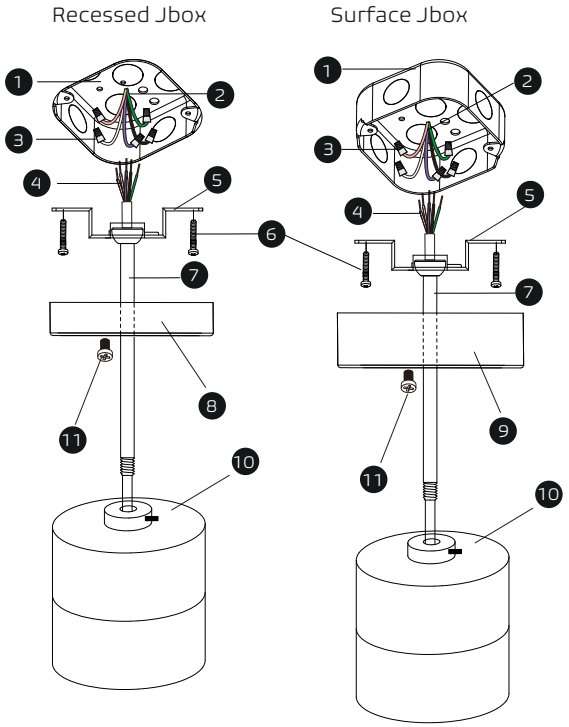

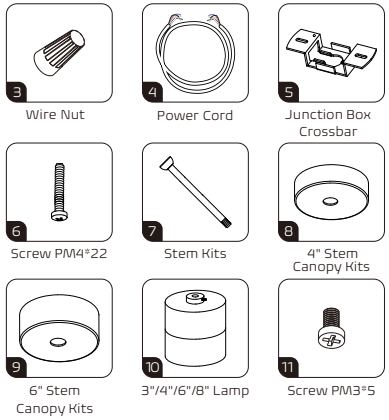

PARTS

1. 4" Octogon Junction Box (By Others)
2. Power Cord (By Others)
3. Wire Nut
4. Power Cord
5. Junction Box Crossbar
6. Screw PM4*22
7. Stem Kits
8. 4" Stem Canopy Kits
9. 6" Stem Canopy Kits
10. 3"/4"/6"/8" Lamp
11. Screw PM3*5

! ATTENTION: Install in accordance with national and local building and electrical codes.

All rights reserved. Due to continuous product improvements, specifications and dimensions are subject to change without notice.