Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long Life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Input from Both Ends
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- High performance plastic series
- 5 Year Warranty
- Superior Wide View Angle
- BAA Compliant



Internal Driver LED Lamp
Double End Input

Flex™
Internal Driver LED Lamp

Specification Data


Model No.	Length	Base type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD
L48T8/830/10P-ID DE BAA	48	G13	10.5	120-277	3000K	1700	82	325	161	0.9	<20%
L48T8/835/10P-ID DE BAA	48	G13	10.5	120-277	3500K	1700	82	325	161	0.9	<20%
L48T8/840/10P-ID DE BAA	48	G13	10.5	120-277	4000K	1700	82	325	161	0.9	<20%
L48T8/850/10P-ID DE BAA	48	G13	10.5	120-277	5000K	1700	82	325	161	0.9	<20%

Ordering Information

EXAMPLE: L48T8/840/10P-ID DE BAA

L	48	T8	8	40	10 P	-	ID	DE	BAA
Manufacturer's Code	Normal Length 48 =48"	Lamp Shape T8 =T8	CRI 8 =>80	CCT 50 =5000K 40 =4000K 35 =3500K	Wattage 10P-10.5W		Internal Driver	Double End Input	BAA Compliant

Wiring diagram

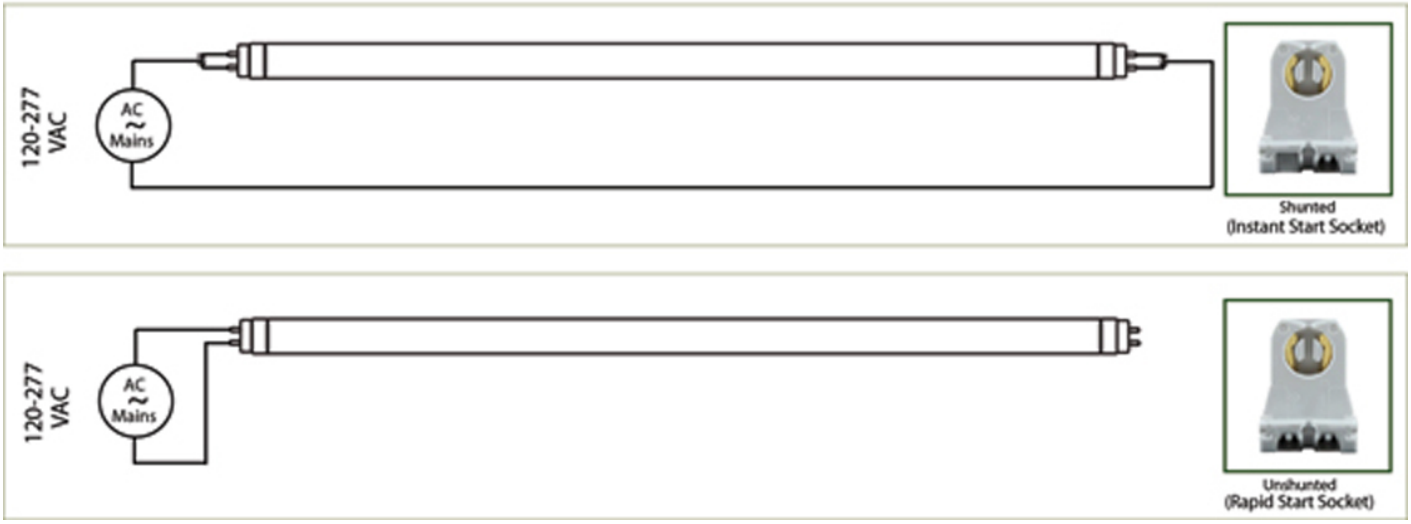

Copyright © 2023 ESPEN Technology Inc. All Rights Reserved
Espen Technology Inc. | 12257 Florence Ave. | Santa Fe Springs, CA 90670
Toll Free: (866) 933-7736 | Tel.: (562) 529-2938 | Fax: (562) 529-2978 | Email: info@espentech.com
www.espentech.com