

OM-EDG-R **Recessed Edge-Lit Aluminum Exit Sign**



Project:	
Type:	
Catalog #:	

STANDARD

OPTIONAL











ILLUMINATION

- Ultra bright, energy efficient, long life Red or Green LEDs.
- UV-stabilized ultra-clear acrylic edgelit panel provides consistent, uniform illumination.
- Double face utilizes factory installed silver or white mylar background panel.

ELLECTRICAL

- Dual 120/277 voltage standard.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery (EM models only).
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Compatible with drywall or drop ceiling mount installations. Bar hangers included.
- Wall mount capability optional.

HOUSING


- Premium-grade, extruded aluminum housing.
- Extruded aluminum trim assembly is easily detachable from below, providing accessibility for service or maintenance. Available in optional black or white powder-coated finishes.
- Self-adhesive Chevron appliques and guide template provided for directional indication.



- WM: Allows for the unit to be wall recessed mounted.
- 2C-120V/2C-277V: Voltage-specific dual circuit option on the AC-only unit enables it to be connected to two different supplies at the same time.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meetselectrical and life safety codes.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- Custom: Signs available with requested 'special' wording.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C − 50°C).
- Certified to CEC under Title 20 Regulations.

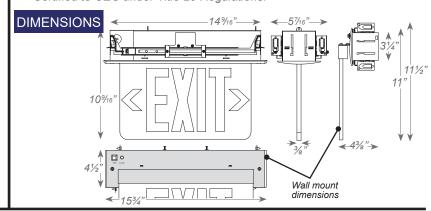

ORDERING INFORMATION										Sample Part Number: OM-EDG-R				
	MODEL	MODEL N		LETTER COLOR		PANEL		TRIM PLATE		BATTERY		0	PTIONS	
	OM-EDG-R	1	Single Face	R	Red	С	Clear 1	W	White	(blank)	AC-Only	WM	Wall Mount ¹	
		2	Double Face	G	Green		Mirror	В	Black	EM	,	2C-120	Dual Circuit With 120V Input ²	
single face only.						W	White	Α	Aluminum		Backup	2C-277	Dual Circuit With 277V Input ²	
lable only with AC units. lable only with EM units. available with SDT.												SDT USA	Self-Diagnostics Assembled In USA	
												CUSTOM	Custom Wording	