



PHOTOMETRIC DATA

MODEL NUMBER	INPUT WATTAGES	LUMEN OUTPUTS*	EFFICACY
RFHB/23/185WS/CS/HBD	90W / 130W / 185W	13,500 / 19,500 / 27,750	≥150 LPW
RFHB/23/200WS/CS/HBD	155W / 185W / 200W	23,250 / 27,750 / 30,000	≥150 LPW

*Lumen Outputs based on 4000K/5000K and HBD Distribution




DIMENSIONS

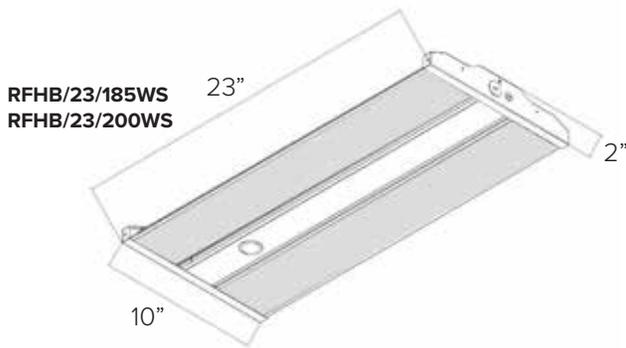


PHOTOMETRIC & WIRE GUARDS


SMBK
Surface Mount
Bracket Kit
(Field Installed)



CMY10FT
10 FT Y-Toggle
Steel Cables
(Field Installed)



PMBK
Pendant Mount
Bracket Kit
(Field Installed)



WG
Wire Guard
(Field Installed)

