

EXTC Compact LED Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD



OPTIONAL

ILLUMINATION

- Ultra bright, energy efficient, long life field selectable Red or Green LED.

ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 1.2V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Aesthetically pleasing, curved face, rounded corner design.
- EZ snap-out chevron directional indicators.

ORDERING INFORMATION

SALIDA face plate option available. Check with your Espen Technology Representative.

MODEL	No. of FACES	LETTER COLOR	HOUSING COLOR	BATTERY	OPTIONS
EXTC	2	Universal Single/Double Face	RGS Red or Green Selectable	WH White BL Black	(blank) AC Only Battery Back-Up
				USA	Assembled in the USA
				2C-120	Dual Circuit with 120V input ²
				2C-277	Dual Circuit with 277V input ²

¹ Field Selectable

² Available only with AC-Only units



OPTIONS

- 2C-120V/2C-277V: Voltage-specific Dual Circuit Option on the AC-Only unit enables it to be connected to two different power supplies at the same time.
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in USA" under the Buy American Act.


WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C – 50°C).
- Certified to CEC under Title 20 Regulations.

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EZRXTU-RED/GREEN EM	1.0	1.0	0.1	0.1

DIMENSIONS

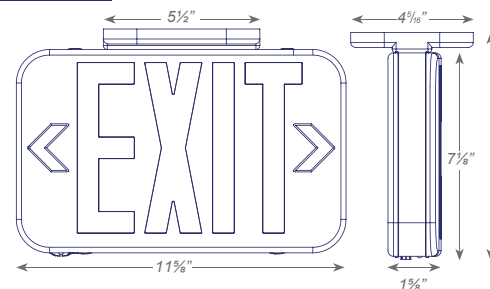

Sample Part Number: EXTC/2/RGS/WH/EM/USA